FOSCAM®

Quick Installation Guide

Wireless HD Baby Monitor

FosBaby   **FosBaby P1**

FosBaby™ (Powered by FOSCAM)

"Foscam" App download

V1.8
EQFB0012

Package Contents

IP Camera

Mounting Bracket

Temperature Detection Sensor

Watch strap

Power Adapter

USB Power Cable

Remote Control (Fosbaby P1 only)

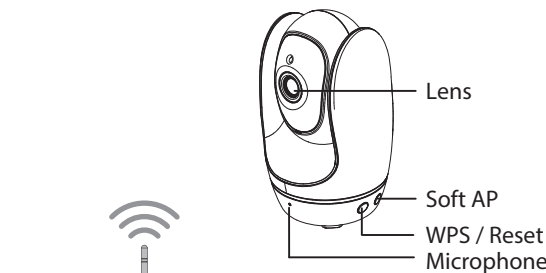Quick Installation Guide

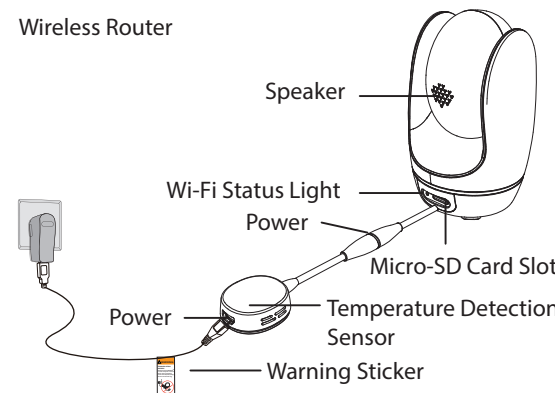Warranty Card

Warning Sticker

CD-ROM

---

1 Hardware Introduction

1.1 Physical Description

■ FosBaby

Lens

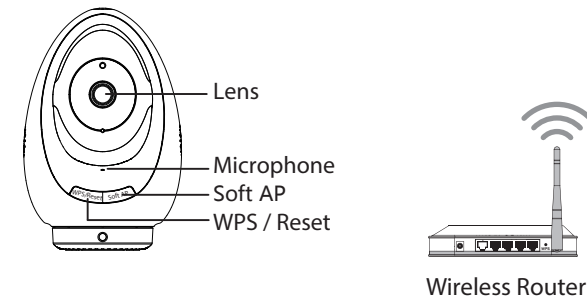Soft AP

WPS / Reset

Microphone

Wireless Router

Speaker

Wi-Fi Status Light

Power

Micro-SD Card Slot

Power

Temperature Detection Sensor

Warning Sticker

■ FosBaby P1

Lens

Microphone

Soft AP

WPS / Reset

Wireless Router

Micro-SD Card Slot

Wi-Fi & System Status Light

Speaker

Night Lamp

Power

Warning Sticker

Temperature & Humidity Detection Sensor
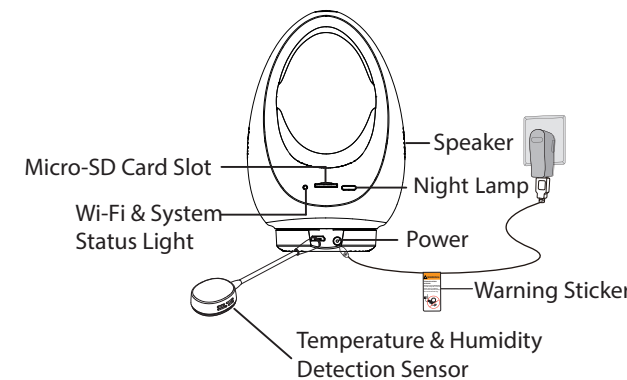
Remote Control Description:

One Key Alert on
Speaker Volume Up
Speaker Volume Down

One Key Alert off
Night Lamp
Play/Stop Lullabies

Up Control

Snapshot

Left control

Right Control

Down Control

FOSCAM
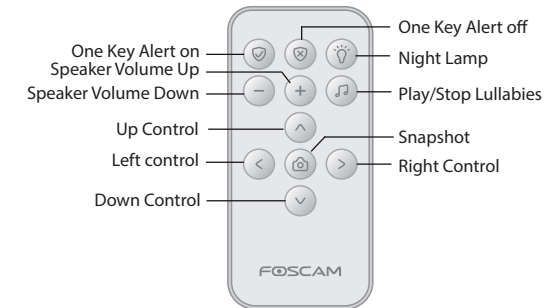
Please Note:
If you used snapshot by the remote control, the default storage path of snapshot files are FTP server and SD card.

■ Wi-Fi Status Light

| Wi-Fi Light	Description
Off	No Wi-Fi connection
Flashing every 0.1 seconds	Soft AP takes effect
Flashing every 0.2 seconds	EZLink takes effect (default)
Flashing every 0.4 seconds	WPS is connecting
Slow Flash every 1.0 second	Wi-Fi connected

Please Note:

● If required, the Fosbaby camera can also be powered using portable or mobile power sources. We suggest an output of 5V/2A and a capacity of 5000 mAH. Under ideal conditions this will provide about 5 hours of use.

● We do not recommend the use of a PC or Laptop power source due to their insufficient current strength. Use of these power supplies may result in damage or inconsistent functioning of your Fosbaby camera.

Before you continue, please note:

● Make sure your smartphone is located near the Fosbaby camera.

● Your smartphone should be connected to the same Wi-Fi network as your fosbaby camera.

● After plugging the Fosbaby P1 to the power supply, the FosBaby P1 will automatically run, cruise startup (Fosbaby P1 only).

1.2 Hardware Installation

- Place the Fosbaby camera directly on a desk (nomounting bracket required).
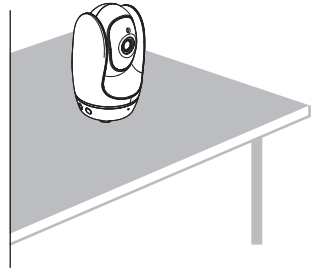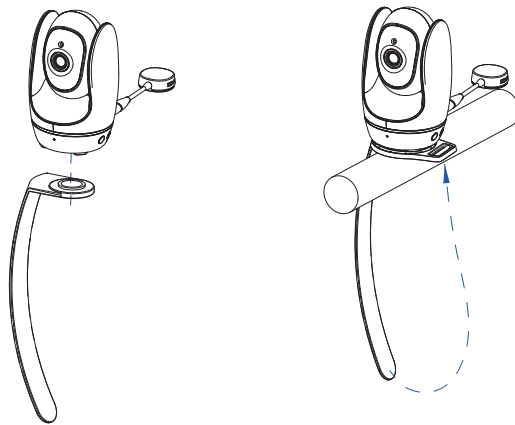
- Install your Fosbaby camera on the wall (with the supplied mounting bracket).
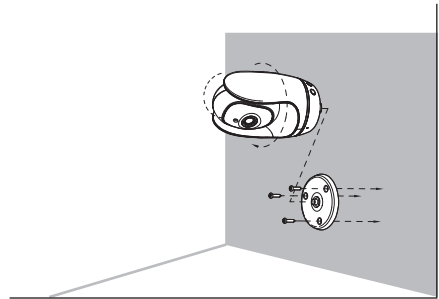
- Take advantage of our provided watch strap for easy fastening!
  The strap will allow you to fasten your Fosbaby in an otherwise challenging location (i.e. Crib, Wall bracket, etc.).

Please note:
The Fosbaby camera should always be fastened out of your child's reach.

2 Add the IP Camera

You can add the Foscam IP Camera using a Smartphone.

1. Download the App

If you have a QR Code scanning app on your phone, please use it to scan the QR code on the front cover of this Quick Installation Guide. This will take you to the download page to install the Foscam App.

The App icon will be displayed below after it is installed successfully:

Please Note:

If you do not have a QR code app on your phone, you can simply go to the App Store or Google Play Store and search the term "Foscam". Find the app that appears with the same icon as shown above, and download it to your device. Ensure that you download the App created by our ShenZhen Foscam Intelligent Technology Co. LTD.
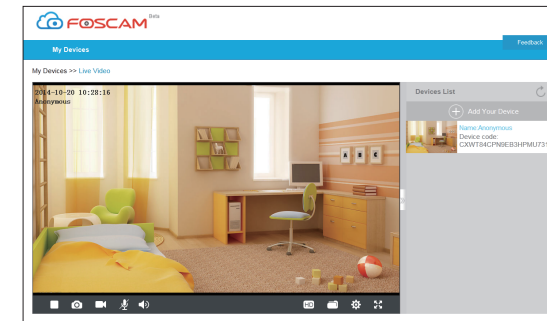
2. Add the IP Camera

Run the App, and then register for a Foscam account. Once logged in, you can tap the "+" button on the App and follow the setup wizard to add your camera.

3 Access the IP Camera

You can also access your Foscam camera via our P2P web portal: *https://www.myfoscam.com* on your Windows PC using Internet Explorer.

If you have registered and added the IP Camera on the Foscam App, you don't have to register again. Rather, just log in and access the camera directly via the app or browser.

As an alternative to accessing the camera via the P2P web portal, you can access the camera directly through the local network and remotely via port forwarding. Please download the "IP Camera Search Tool" from *http://www.foscam.com* .

Shortcut icon for Windows OS   Shortcut icon for Mac OS

4 FAQ

Forgot Username / Password

Restore camera back to factory settings:

1. Press and hold the "Reset" button on the camera for about 10 seconds with the camera powered on, and then release.

2. Once the button is released, wait about 30 seconds, and the FosBaby will automatically restart, cruise startup, and then restore itself to its Factory Settings. The username and password will be set to the default username and password.

Please Note:

- After restoring to factory default settings, you need to re-configure the Wi-Fi connection. You can follow the Setup Wizard of the App to configure your Wi-Fi connection again.

- If your device fails to connect to the Wi-Fi using the Setup Wizard, you can also use WPS mode or the Soft AP connection.
  Please refer to the User Manual on the Foscam website at *http://www.foscam.com* .

5 Technical Support

If you have problems with your Foscam IP Camera, please contact the Foscam reseller who you purchased your carema from, Alternatively you can e-mail the Foscam's technical support team: **tech@foscam.com**.

Your valuable comments and suggestions on improving Foscam products are welcomed!

ShenZhen Foscam Intelligent Technology Co., Ltd

www.foscam.com